Estimation of salt balance in salt-affected ecosystems in arid areas, Case Study: El Fayoum depression, Egypt

تقدير الميزان الملحي في الانظمة البيَّئِيَّة المتأثرة بالملوحة في المناطق الجافة "حالة در اسة :منخفض الفيوم- مصر"

El-Sheikh, A., and GAD, M. I., Hydrology Department, Desert Research Center, Cairo, Egypt e-mail: abdelfattah_elsheikh@yahoo.com

ملخص البحث:

تعاني معظم المناطق الزراعية بمحافظة الفيوم من مشكلة تدهور الإنتاج الزراعي كنتيجة طبيعية للمشاكل البيئية وأهمها إزدياد ملوحة قطاع التربة نتيجة لتبخر المياه الجوفية القريبة من سطح الأرض وفي هذا البحث تم عمل ميزان ملحي لقطاع التربة للوقوف على أسباب وطرق حل هذه المشكلة البيئية. تبين من نتائج البحث أن كمية الأملاح التي تدخل قطاع التربة تصل إلى 2.48 مليون طن سنوياً بينما الكمية التي تفقدها التربة تصل إلى 3.8 مليون طن سنوياً مما يعكس وجود كمية أملاح بقطاع التربة تقال من إنتاجية الفدان وتنسبب في تدهور الأرض الزراعية . وعليه توصي الدراسة بإنباع أساليب الصرف التربة تصل لتقليل الأملاح الناتجة عن الصرف الزراعي بالطرق التقليدية.

Abstract

El Fayoum depression is a semi-closed depression located about 100 Km southwest of Cairo-Egypt It occupies an area of about 1200 Km². Due to the complex geological and hydrological conditions of that area, water logging problem and soil salinization affect great parts of the cultivated areas. The geological conditions are manifested in the rich content of clay in the Quaternary aquifer, the relative small aquifer thickness and the dominance of faulted and fractured limestone at the base and on the peripheries. On the other hand, the hydrological conditions include the occurrence of a thick net of irrigation system and presence of huge surface water bodies; e.g. Qarun lake and Wadi El Rayan lakes. Moreover, the groundwater depths vary from few centimeters below ground surface to 7.51 m which reflect a critical soil salt-affected problem. The present paper throws light on the salt balance of the groundwater regime. The estimation of the input and output components is carried out based on the field measurements during 2006. The estimated mean annual salt influx reaches 2.05 million tons. The Output component includes the salt efflux through the drainage network, subsurface groundwater flow and the salinity losses due to plant uptake. The estimated annual mean value of salt efflux from these three components reaches 3.8 million tons. The average annual storage component is estimated to be -1.75 million tons. The estimation of salt balance shows that the groundwater or/and soil water receive an excess of annual salt content of 1.75 million tons due to leaching process of evaporites and clay lenses during its flow from the upstream till it reaches the downstream area (Qarun Lake). Mitigation of imbalanced salt load through minimizing the losses from drainage network and using low consumed cop pattern is highly recommended.

Keywords:

Hydrogeology- Water logging-Salt influx-Salt efflux-El Fayoum depression

1. Introduction

The concerned area is located southwest of Cairo city by about 100 km and northwest of Beni Suef by about 30 km (Fig. 1). It is limited between latitudes 29° 00[\] and 29° 30[\] North and longitudes 30° 20[\] and 31° 10[\]

East with an area of about 1200 km^2 . This area is characterized by arid climate. The mean temperature records 36 °C in summer and 20 °C in winter. Rainfall is relatively low. The mean annual rainfall depth is 10

Received: 23 September, 2014 - Revised: 30 September 2014 - Accepted: 28 October, 2014

mm. The maximum mean evaporation intensity reaches 306 mm (in July).

Geomorphological setting

Geomorphologically, three geomorphic units characterize the surface of El Fayoum depression and its vicinities. El Fayoum depression is bounded by tablelands from east, south and west, separating the depression from the Nile Valley and Wadi El Rayan depressions (Tamer 1968). These tablelands include Gisr El Hadid (50 masl) and Gebel El Lahun- Gebel El Naalun (150 masl).The morphtectonic depressions include Nile Valley depression (25 masl), El Fayoum depression (-45 masl) and Wadi El Rayan depression (-60 masl). The great monoclinal edge (Gebel Qatrani 400 masl) bounds El Fayoum depression from north and northeast (Abdel Baki 1972). It is characterized by dry shallow wadies directed towards Qarun Lake (QL). The depression surface is characterized by dense network of irrigation and drainage canals besides the great natural OL while sand sheets and artificial lakes distinguish Wadi El Rayan depression.

Geological setting

Geologically, El Fayoum depression and its vicinities are occupied by a surface sedimentary section of about 484 m thick belonging to Tertiary and Quaternary rocks (Said 1962; Tamer 1968; Tamer et al. 1975; Awad 1984). Tertiary rocks include Eocene, Oligocene, Miocene and Pliocene rocks (Fig. 1). They form the surrounding walls of El Fayoum depression and sometimes appear in the bottom of the deep grooves inside the depression. These rocks consist mainly of limestone, marl and shale with basalt and sandstone in the northern, western and southern margins of the depression while Quaternary deposits develop into the form of aeolian, nilotic and lacustrine deposits. Sand and clay facies are dominating most of the depression area. Folding and faulting are the common structural elements in the study area. NE-SW surface anticlines were detected in Wadi El Rayan and north QL. In addition, NW-SE faults (Clysmic trend), NE-SW faults (Aqaba trend) and E-W faults (Mediterranean trend) are recognized at the depression (Tamer et al. 1975).

Hydrogeological setting

The hydrogeological conditions of El Fayoum depression were the object of many studies such as (Abdel baki 1972; El Hakeem 1977; Himida and Abdel Baki 1980; El Diftar 1983; Desert Research Institute 1986; Dahab 1986; Tamer and Faheem 1987; Diab and Shided 1999; El Sheikh et al. 2008). Based on these studies, there are three aquifers in El Fayoum area, the Quaternary Aquifer of El Fayoum Depression (QAFD), Fissured Eocene aquifer and Nubia sandstone aquifer. The QAFD is dissected by a network of irrigation canals and drains. The total length of the irrigation canals reaches 1306 km and transports 2680 million m³/year (El Sheikh 2005). In addition, drainage canals consist principally of two large drains (El Wadi and El Bats drains) besides a group of short drains. The total length of these drains reaches 154 km and transports 963 million m³/year of drainage water to both QL and Wadi El Ravan lakes. Surface water constitutes the main recharging source for groundwater due to both the dense of irrigation canals and flood irrigation system. The QAFD is generally composed of sand with rich content of clay (Fig. 2). However, it is more gravelly at west. east four layers are well Towards recognized, silty clay layer at the top and sandy clay layer in the middle, while sand and clay intercalations characterize the bottom with high fossil content. The clay facies increase towards QL and become calcareous in the lower part. The clay-rich content sediments in the northern and eastern directions decrease the vertical

movement of seepage water and consequently water logging creation in addition to the Eocene marl and limestone which form the base of the QAFD. The maximum thickness of QAFD is present in the center of the depression (Sanhour-Ibshiway area) where it reaches 40m while the minimum thickness is present along the peripheries due to local faulting. OAFD is characterized by low transmissivity values all over the depression area (from 13 to 84 m^2/day , El-Hefnawy et al. 2006). These indicate low groundwater values potentiality of the QAFD. The water balance of the QAFD during the hydrologic year 2004/05 shows an imbalance between the outflow components and the inflow components by 70.2 million m³ which may be attributed to the upward leakage from the deep aquifer through fault zones (El-Sheikh 2005).

In the other hand, the fissured Eocene limestone aquifer extends under the QAFD. It is composed of limestone marl and clay. Groundwater of this aquifer appears as springs issued in some places. In addition, the Nubia sandstone aquifer is composed of sandstone and shale of Cretaceous age. It is not exposed in the area of study but reported in the subsurface succession at Wadi El Rayan. The Nubia formations are generally characterized by relatively high hydrostatic pressure (Himida and Abdel Baki 1980). The mineral springs of Wadi El Rayan are flowing at a dynamic level of 25 masl where their water are originated from the Nubia sandstone aquifer. Their water salinity ranges between 3500 to 8000 ppm QL (Faiad 2000). Nowadays level continuously rises causing the formation of strip of water logged area parallel to its southern shoreline. The mathematical solution of the general equation of the salt balance for any hydraulic closed system is used in this paper to mitigate the soil water salinization and water logging problems in the QAFD.

2. Materials and methods

The materials used in this paper were collected through carrying out four field trips in El Fayoum depression area during the period 2005-06. During these field trips, a network of 21 observation wells penetrating the QAFD was constructed. Among them, 18 piezometers were drilled during the year 2005 by Desert Research Center, while the rests were drilled by the The location of these stockholders. observation wells was given in (Fig. 1). Periodic depth to groundwater level was recorded in 18 observation wells during Oct. 2004 and July 2006 (Table 1) and of soil water salinity characteristics problem and its spatial and temporal variation, as well as its future behavior, was thoroughly investigated by periodic analysis of collected water chemical samples.

The methodological approach used in this paper is based on the mathematical solution of the general equation of the salt balance for any hydraulic closed system. The salt balance of the soil water zone in any irrigated lands depends on the assumption that, all salts are soluble and not precipitate. The general equation for salt balance estimation can be written as;

Soil water salt influx = Soil water salt efflux + Change in soil water salinity All components that comprising salt influx and efflux depend on the quantities of water entering and flowing out from the soil zone multiplied by its salinity. Accordingly, the equation for the estimation of salt balance in an irrigated area can be expressed as (ILRI 1994);

I.C_i + E.C_i + R.C_r + G.C_g = ET_c. C_i + D.C_d + P.C_p + Δ S.....1 Where: I, E, R, G, ETc, D and P are the quantity of water due to irrigation, evaporation, rainfall, upward flow, evapotranspiration, subsurface flow and deep percolation, respectively $(L^{3}T^{-1})$. C is the salinity of water (ppm) and the suffix i, r, g, d and p refer to salinity of irrigation water, rain water, groundwater, drainage water and deep percolation water, respectively. I.C_i and E.C_i represent the salt influx due to irrigation and evaporation from the shallow water table or surface water bodies. R.C_r and $G.C_g$ are the salt influx resulted from rainfall and upward flow of groundwater. Due to the scarcity of rainfall and presence of impermeable beds beneath the soil zone in QAFD, both elements can be neglected. $ET_c . C_i$ and $D. C_d$ are the salt efflux due to plant evapotranspiration and subsurface flow to the drains. P.C_p is the salt efflux due to deep percolation from the soil zone. For the studied area, the P.C_p element is excluded (Gad and Abdel-Baki 2002). Δ S is the change in the soil salt storage.

3. Results and discussion

According to the groundwater level measurements (Table 1), water table maps at Oct.2005 and July 2006 were constructed (Fig. 3). These maps show that the groundwater flows generally from south to north and northwest directions. The groundwater levels decrease from south and southeast towards west and northwest i.e. from 15 masl and 20 masl to -40 masl close to QL. The curvature of contour lines relative to the directions of the irrigation network indicates that the canal network acts as influent streams (recharge areas) in southern part, while it operates as effluent streams (discharging areas) in the northern part. Moreover, there is a remarkable rise in groundwater levels in the western part of the depression area indicated by the concentric contour lines. This local rise may result either from the downward

seepage from the irrigation water or the upward leakage from underlying fractured limestone aquifer (Gad and Saafan 2006). According to (Saafan et al. 2009) QAFD receives about 56 million m³/year of return flow after irrigation and/or upward leakage from underlying aquifers, causing the continuous rise in the groundwater levels. The fissured Eocene limestone aquifer; extending under the QAFD inside the depression, considers the source of upward leakage since its groundwater appears as springs issued in some places as mentioned before. In addition, viewing ILRI's equation and neglecting the non-represented components, the salt balance equation for the soil zone of QAFD can be written as follows (Gad and Abdel Baki 2002):

 $(I. C_i) - (D.C_d + GW.C_{g+} ET_c. C_i) = \Delta S$...2

Estimation of mean salt influx (I. C_i)

As mentioned before, the main salt influx enters the QAFD from the irrigation water network (Fig. 4-left map). The irrigation canals in El Fayoum depression have a total length of about 1306 Km, transferring about 2680 million m³/year of the Nile water to the depression that serving an area of about 399677 feddan of cultivated land (Table 2). This amount enters El Fayoum depression through Bahr Yousef, the main channel across El Lahun regulator at the southeast. Referring to (Table 2) and (Fig. 4-left map), the old cultivated land of QAFD comprises the presence of 399677 feddan that consume 2680 million m^3 /year through 347 canals. A part of this amount infiltrates to the soil zone, from which the subsurface inflow component takes place. The other part seeps directly to the lakes through drainage network. Concerning the average salinity of irrigation water C_i that equals 768 g/m³ (Table 3); so

C: 19

The mean salt influx (I. C_i) = 2860 x 10⁶ (m³/year) x 768 g/m³ = 2058240 x 10⁶ g/year that means 2058240 tons of salts enters the QAFD.

Estimation of mean salt efflux

The main salt efflux includes the fluxes due to drainage water, subsurface outflow (groundwater seepage to QL) and plant evapotranspiration. The estimation of every component is given in the following.

1-Estimation of mean drainage water salt efflux (DW. C_{d})

The drainage network consists principally of two large drains, El Bats and El Wadi drains besides a group of short drains (Fig. 4-right map). The drainage network transports 962 million m³/year both to OL and Wadi El Rayan depression at west, resulting of huge lakes. The total length of El Fayoum drains attains 154.37 Km, serving an area of 433435 feddan (Table 4). Referring to (Table 4) and (Fig.4-right map), the old cultivated land of QAFD comprises the presence of 155 km of open drains transferring a quantity of drainage water estimated as 963 million m³/year (El sheikh 2005). The salinity of these drains ranges between 1713 mg/l to 3601 mg/l with an average value about 2583 mg/l. Concerning the average salinity of drainage water C_d that equals 2583 mg/l or 2583 g/m^3 , the mean salt efflux resulted from the drainage water can be estimated as follow;

(DW. C_d) = 963 x 10⁶ (m³/year) x 2583 g/m³ = 2487429 x 10⁶ g/year

This means that 2487429 tons of salts eliminated from the soil of the QAFD and enter Qarun and Wadi El Rayan lakes causing intensive salinity rise problem.

2- Estimation of mean groundwater salt efflux (GW. C_g)

QL borders the QAFD from north forming a natural discharging area. Groundwater seeps to the lake by gravity. Darcy's equation is applied to estimate the quantity of groundwater recharges the lake.

Where; Q is the quantity of water (m^3/day) , K is the hydraulic conductivity (m/day), A is the front area (m^2) and I is the hydraulic gradient (dh/dl). A groundwater level contour map is constructed to estimate the average hydraulic gradient against the QL (Fig. 5). The hydraulic gradient is estimated as 0.0039. The hydraulic conductivity and the front area are equal to 3.3 m/day and $400,000 \text{ m}^2$ respectively (Elsheikh 2005). Therefore, the amount of groundwater seeps to QL from the QAFD is estimated as 1.879 million m^3 through the measurement year. According to the average salinity of groundwater in the area adjacent to the QL as estimated from the chemical analysis of the collected groundwater samples from the adjacent piezometers (Fig. 6 and Table 5), the average salinity of the groundwater ranges from 13248 to 45100 mg/l with an average value of about 32037 mg/l. Considering the quantity of groundwater seeps out from the QAFD to QL as 1.879 million m^3 /year. As a result, the mean salt efflux resulted from the groundwater seepage can be estimated as follow;

(GW. C_g) = 1.9 x 10⁶ (m³/year) x 32037 g/m³ = 3870.3 x 10⁶ g/year

This means 3870 tons of salts eliminated from the soil of the QAFD and enter QL causing intensive salinity rise problem of the lake.

3-Estimation of mean evapotranspiration salt efflux (ET. C_{et})

The third component concerning the salt efflux is the evapotranspiration $(ET_c \cdot C_i)$. Due to the dense cultivation of El Fayoum depression, huge quantity of water is discharged from the QAFD by means of evapotranspiration. The mean evapotranspiration of the crop unit in QAFD was estimated depending on Penman-Montith method (Smith 1992).

The mean value of the consumptive use of each crop is multiplied by its cultivated area to give the total consumptive use of this crop (Table 6). Accordingly, the total crop unit consumptive use of the QAFD was estimated as $1715.59 \times 10^6 \text{ m}^3$ /year. As a result, the mean salt efflux resulted from the evapotranspiration can be estimated as follow;

(ET. C_{et}) = Total crop unit consumptive use x salinity of irrigation water = 1715.59 x 10⁶ (m³/year) x 767.9 g/m³ = 1317401.6 x 10⁶ g/year

This means 1.3 million tons of salts eliminated from the soil of the QAFD by the different cultivated crops in the depression.

Estimation of storage parameter (Δ S)

The difference between salt influx and efflux equals the storage factor. The estimated net result of the salt influx and the salt efflux of the old cultivated lands during hydrologic year 2005/2006 refer to;

Mean annual salt storage= Mean annual salt influx - Mean annual salt efflux = 2.48million tons - 3.8 million tons = -1.75million tons

Accordingly, the estimated salt balance of the soil water in the QAED shows that the annual mean of the salt influx reaches 2.48 million tons while the annual mean of the salt efflux reaches 3.8 million tons with an annual average storage of magnitude 1.75 million tons. These figures mean that every feddan in the studied area losses about 4.378 tons of salts every year (mainly sodium chloride) neglecting the effect of salt load increase due to upward of saline water from the underlain Eocene fractured aquifer. This decreases the sharp deterioration problem for these cultivated areas. Moreover, the probable decrease of salt load per feddan in winter than that in summer may attribute to the intensive agriculture activities in summer more than in winter. So, the change in crop unit may use in decreasing the deterioration problem. It is obvious that the system is imbalanced concerning salt loads where the output exceeds the inputs with more or less than twice. This imbalance may be attributed to the excess salt loads resulting from leaching process. groundwater dense network drainage and salt water encroachment from upward leakage from Eocene aquifer through fractures.

4. Conclusion and recommendations

The estimation of the salt balance in the soil water of the old cultivated land in QAFD (399677 Fed. with total water requirements 2.86 milliard m^3 /year) during the hydrologic year 2006 exhibits that the average quantity of water entering the soil zone during the year 2006 reaches 2.86 milliard m^3 , with average annual salt influx of magnitude 2.05 million tons. While the mean annual salt efflux from the soil water reaches 3.8 million tons. Accordingly, the following is recommended to mitigate the imbalance of salt loads:

1- The drainage network system must be changed to modern drainage system to minimize the losses and consequently, decrease the salt efflux since the mean salt efflux due to the drainage system (2.48 million tons) represents twice the mean salt efflux due to the evapotranspiration (1.3 million tons).

2- The crop unit must be changed into low consumed plants to decrease the salt efflux required for salt balance.

References

[1] Abdel Baki, A. A. (1972): "Hydrogeological conditions and paleohydrogeological reconstruction of Fayoum and Wadi El Rayan" M.Sc. Thesis, Fac. of Sci., Cairo Univ., Egypt. [2] Awad, G. M. (1984): "Habitat of oil in Abu Gharadig and Fayoum Basins, Western Desert, Egypt" American Associ. of Petr.Geolog. Bull., Vol.68, No.5, pp. 564-573.

[3] Dahab, K. A. (1986): "Geological and hydrogeological studies of El Fayoum depression and its vicinities" M. Sc. Thesis, Geology Depart., Faculty of Sc., Minuofiya Univ., Egypt.

[4] Desert Research Institute (1986): "Hydrogeological and hydrological study of El Fayoum depression" Unpublished Arabic Report, Matariya, Cairo, Egypt.

[5] Diab, M. Sh. and Shided, A. G. (1999): "Water regime of El Fayoum and Wadi El Rayan depressions, Western Desert, Egypt" The second international conference, Struc. Eng. Dept., Fac. Eng., Mansoura Univ., Mansoura, Egypt.

[6] El-Diftar, M. T. (1983): "Final report of Birket Qarun research project" Geological Survey of of Egypt, unpublished Arabic report.

[7] El-Hakeem, O. (1977): "Water balance of lake Qarun, Report of the Research Inst. Of Water Distribution and Irrigation methods" Ministry of Irrigation, Cairo, Egypt.

[8] El-Hefnawy, Gad, M. I., El-sheikh, A. E., Abdel Baki, A. A., M. A., and Abu [9] El-Fotouh, M. (2006): "Numerical simulation of the groundwater rise control in El-Fayoum Depression, Western Desert, Egypt". 5th Int. Eng. Conf., Sharm El-Sheikh, 12 Jan. 2006. pp 320-333.

[10] El-Sheikh A. S., El Mililigi E.M. and Ibraheem S. M. (2008) "Hydrology of Qarun lake, El Fayoum depression, Egypt" Bull. NRC, Egypt, Vol.33, No. 1, pp1-26.

[11] El-Sheikh, A. E. (2005): "Water budget analysis of the Quaternary deposits for the assessment of the water logging problem of El Fayoum depression" Ph.D. Thesis, Fac. of Sci., Al-Azhar Univ., Egypt, 233 p.

[12] B. J. (2000): Faiad, Hydrogeological and geophysical assessment of groundwater, surface water and soil resources for the reclamation activities in the area between Beni Suef and El Fayoum, West of the Nile Valley, Egypt" Unpublished Ph. D. Thesis, Fac. Sc., Ain Shams Univ., Cairo, Egypt, 316 p. [13] Gad, M. I., and Abdel-Baki, A. A. (2002):"Estimation of salt balance in the soil-water of the old cultivated land in Siwa Oasis, western Desert, Egypt". Proceedings International Symposium of the on Optimum Resources Utilization in Saltaffected Ecosystems in Arid and Semi-Arid Regions, 8-11 April 2002 Cairo, Egypt. Pp 16-23.

[14] Gad, M. I., and Saafan, T. A. (2006): "Numerical Simulation of The Ponds Water Salinity in Siwa Oasis,Western Desert, Egypt", Fifth International Engineering Conference, Sharm El-Shikh, 27- 31, March 2006.

[15] Himida, I. H. and Abdel Baki, A. A. (1980): "Hydrogeological conditions of El Fayoum and Wadi El Rayan depressions A. R. E" Ann. Geol. Surv. Egypt, Vol. 10, pp. 837-853.

[16] International Institute for Land Reclamation and Improvement (ILRI) (1994): Drainage Principles and Applications, ILRI Publication 16 (Second Edition), H.P. Ritzema (Editor-in-Chief), AA Wageningen, Netherlands, 1994, 1125 pp.

[17] Saafan, T. A., El-Sheikh, A. E., and GAD, M. I. (2009): "Numerical simulation of the proper dewatering system as a tool of the groundwater rise control in El-Fayoum depression-Egypt" Water Management Journal, Shiraz, I. R. I., Vol. 3 (1) 2010

[18] Said, R. (1962): "The geology of Egypt" Elsevier Pub. Co., New Yourk, 377 p.

[19] Smith, M. (1992): "CROPWAT". A computer program for irrigation planning and management. Irrig. & Drain. Paper, No. 46, FAO, Rome, Italy.

[20] Tamer, A. M. (1968): "Subsurface geology of the Fayoum region" M.Sc. Thesis, Fac. of Sci., Alex. Univ., Egypt.
[21] Tamer, A. M. and Faheem, S. M.

(1987): "Effects of surface water on

hydrological setting in El Fayoum depression" Sohag Pure and Applied Sci. Bull. Vol. 3, pp. 236-255.

[22] Tamer, A., El Shazly, M. and Shata, A. (1975): "Geology of El Fayoum Beni Suef region, Part II-Stratigraphy" Bull. Desert Inst., Matariya, Cairo, Egypt, No.1, 2, pp. 27-47.

Univ., Egypt.

Table 1: Ground elevation (masl), total depth of the observation well (m) and the groundwater levels (masl) in the QAFD during the period Oct. 2004-July 2006

	Locality	Location		G. elev.	Т. D	October 2004*		October 2005		July 2006	
ID	name	Lot	Long	(masl)	(m)	DTW	WL	DTW	WL	DTW	WL
	name	Lat.	Long.	(masi)	(III)	(m)	(masl)	(m)	(masl)	(m)	(masl)
P1	Sobeh	29 24 29	30 31 31	-41.64	3	0.95	-42.59	0.60	-42.24	0.77	-42.41
P2	Rawashda	29 23 34	30 36 44	-18.21	4	0.76	-18.97	0.62	-18.83	0.93	-19.14
P3	Hana habib	29 20 39	30 34 01	8.23	6	0.55	7.68	0.45	7.78	0.61	7.62
P4	AboGabal	29 20 02	30 37 04	6.71	4	1.25	5.46	1.12	5.59	1.38	5.33
P5	Miqrani	29 16 54	30 38 47	-1.66	5	0.98	-2.64	0.78	-2.44	1.03	-2.69
P6	Abo Gandir	29 15 03	30 40 09	5.23	7	0.31	4.92	0.30	4.93	0.44	4.79
P7	Al -Prince	29 09 54	30 37 16	8.95	7	2.54	6.41	2.48	6.47	2.89	6.06
P8	Al-Hagar	29 08 04	30 38 41	9.2	4	0.70	8.50	0.80	8.4	0.95	8.25
P9	Tatoun	29 09 10	30 47 50	14.35	7.6	0.42	13.93	0.41	13.94	0.56	13.79
P10	Al-Wabor	29 11 47	30 45 28	14.83	2.5	0.03	14.80	0.10	14.73	0.41	14.42
P11	Al-Azab	29 15 11	30 50 33	20.03	3.7	1.15	18.88			0.95	19.08
P12	El-Khatib	29 18 11	30 44 19	17.52	3	0.42	17.10	0.50	17.02	0.51	17.01
P13	Tobhar	29 18 19	30 49 08	21.34	5	0.38	20.96			0.42	20.92
P14	Ibshiway	29 21 38	30 40 32	0.25	7	1.68	-1.43	1.14	-0.89	2.1	-1.85
P15	El-Celein	29 22 40	30 47 23	15.65	44	7.30	8.35	7.20	8.45	7.98	7.67
P16	Oberge	29 28 01	30 46 32	-42.2	6	1.72	-43.92	1.33	-43.53	1.48	-43.68
P17	Tadrus	29 28 40	30 51 29	-33.15	5.5	0.70	-33.85			0.78	-33.93
P18	El-Kaabi	29 22 03	30 51 54	17.8	6	0.55	17.25	0.45	17.35	0.57	17.23

G. elev. = Ground elevation (masl), DTW = Depth to groundwater (m), WL = Absolute groundwater level in masl, October 2004* = The source data from (El Sheikh, 2005)

Locality	Depression	Canals				
	part	number	Length (Km)	Area service (Feddan)		
El Fayoum	Middle part	62	269.50	73794		
Sinnuris	-	54	207.42	54732		
Tamia	Eastern part	44	157.25	75325		
Ibshiway	Western part	116	416.84	97344		
Etsa	South part	71	255.31	98482		
Total	-	347	1306.32	399677		

Table 2: Numbers and lengths of the irrigation canals in El Fayoum depression

Table 3: Salinity of irrigation canals of El Fayoum depression

Canal name	рН	Total dissolved solids (mg/l)	
B.Yousef	7.1	373	
B.Hassan Wasef	7.5	503	
B.El-Nazla	7.8	428	
B. Qasr El-Banat	7.5	484	
B.Wahby	6.9	472	
B.Shalat	7.7	336	
B.Arus	7.7	396	
B.Sanhur	7.2	491	
B.Rafaa	7.8	1647	
B.MishiIk	7.8	1181	
B.Awlad Mahmou	7.2	580	
B.Feddmin	6.9	526	
B.Ibshiwy	7.3	544	
End-Nazla	7.3	1206	
Tirit El-Gomhorya	7.5	2037	
B.Qouta	7.2	1950	
B.Tersa	7.4	772	
B El-Gharaq	7.1	516	
B.El-Kaabi	7.5	556	
B.Shahla	7.5	360	
Average		767.9	

Drain name	Down stream	Length (Km)	Area served (Fadden)	Ph	Salinity	
		(KIII)	(rauten)		(mg/l)	
El Batts	Qarun lake	50.848	136800	7.5	1556	
El Wadi	Qarun lake	48.51	17500	7.4	2207	
Abu Harawa	Qarun lake	7.550	2500	7.4	2987	
Batts Said	Qarun lake	4.754	800	7.4	1713	
Abu Tarfaya	Qarun lake	6.270	1600	7.10	2137	
Hurr El Hitan	Qarun lake	3.810	1363	8.2	3025	
Hodoud Tersa	Qarun lake	9.700	1200	7.3	4436	
El Sheikh Allam	Qarun lake	7.631	8600	7.3	3142	
Hodoud Ibshiway	Qarun lake	9.400	3300	7.2	3601	
El Misharrik	Qarun lake	7.123	2000	6.5	2325	
Al Eslah	Qarun lake	8.560	629	8.2	3025	
El Hamam	Qarun lake	4.265	2500	7.7	2287	
Battn Ihreet	Qarun lake	8.910	6000	7.10	2137	
Quta drain	Qarun lake	8.358	1160	6.9	2083	
Wadi El Rayan	Wadi El Rayan lakes	15.80	-	6.9	2083	
Total		154.73	433435			
Average					2582.9	

Table 4: Salinity, lengths and area served of drainage canals in El Fayoum depression

Table 5: Piezometers used to measure the salinity of groundwater near Qarun lake

Serial	Locality	pН	Salinity
No.	name	_	(mg/l)
P1	Sobah	7.2	17408
P2	Rawashda	8.2	52392
P16	Oberge	6.3	45100
P17	Tadrus	7.2	13248
Average			32037

Crop type		Crop unit consumptive use (m ³ /feddan) (Penman - Montith method, Smith 1002)	Crop area (feddan)	Annual crop unit consumptive use (million m ³)
		1992) 2060	46000	94.76
Wheat				
Broad bean		1862	60000	111.72
Berceem		2308	144892	334.42
Medical & aromatic	ter	1719	7177	12.34
Barley	Winter	1730	13183	22.81
Fenugreek	_	1254	3550	4.45
Beat Sugar		2265	7367	16.69
Vegetables		1041	34150	35.55
Onion & Garlic		1758	70136	12.37
Cotton		3800	25000	95.00
Sycemum		2597	4739	12.31
Ground Nuts		3093	1325	4.10
Medical & aromatic	er	3487	7202	25.11
Maize	Summer	2729	45000	122.81
Sunflowers	Sur	3118	13430	41.88
Sorghum		3042	60000	182.52
Vegetables		2644	134818	356.46
Rice		5391	15000	80.87
Sun flowers		3118	1010	3.15
Maize	ii	1947	3893	16.34
Sorghum	Nili	2097	1075	2.25
Vegetables		1520	43276	65.78
Citrus trees	Ξ	2662	22203	59.10
Sugar Cane	Annual	8249	343	2.83
Total				1715.59

Table 6: Total crop unit consumptive use in the QAFD (After Elsheikh 2005)

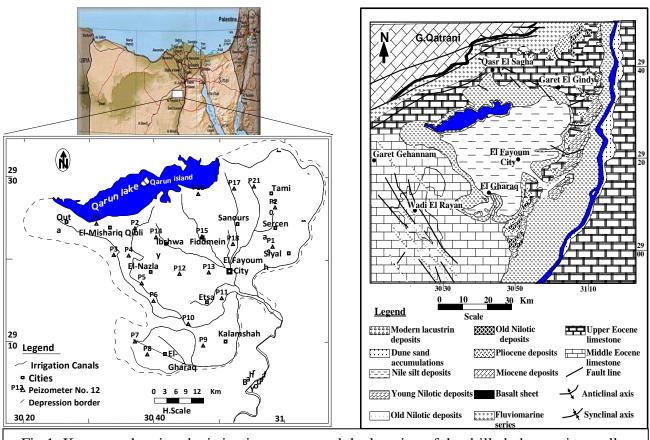


Fig.1: Key map showing the irrigation system and the location of the drilled observation wells (left map) and the Geological setting of the study area (right map)

